

## General product information

# Elastollan<sup>®</sup> 695 A U

®= Registered Trademark of BASF Polyurethanes GmbH

### Characteristic:

Transparent, UV stabilized thermoplastic Polyester Polyurethane Elastomers with excellent mechanical properties and wear resistance, good damping characteristic and a high resilience performance.  
Processable by injection moulding and extrusion.

Property	Value	Unit	Test method according to
Hardness	<b>50</b>	Shore D	DIN ISO 7619-1 (3s)
Density	<b>1.22</b>	g/cm <sup>3</sup>	DIN EN ISO 1183-1-A
Tensile strength	<b>50</b>	MPa	DIN 53504-S2
after storage in water at 80°C for 21 days	<b>40</b>		
Elongation at break	<b>500</b>	%	DIN 53504-S2
after storage in water at 80°C for 21 days	<b>550</b>		
Stress at 20% elongation	<b>6</b>	MPa	DIN 53504-S2
Stress at 100% elongation	<b>10</b>	MPa	DIN 53504-S2
Tear strength	<b>100</b>	N/mm	DIN ISO 34-1Bb
Abrasion loss	<b>40</b>	mm <sup>3</sup>	DIN ISO 4649-A
Compression set at 23°C / 72 hours	<b>25</b>	%	DIN ISO 815
Compression set at 70°C / 24 hours	<b>40</b>		
Notched impact strength(Charpy) 23°C	<b>No break</b>	KJ/m <sup>2</sup>	DIN EN ISO 179-1
-30°C	<b>200</b>		
Yellow index	<b>&lt; 15</b>	-	ASTM E313

Test plates are manufactured by injection moulding from pre-dried pellets (water content less than 0.02%). Test plates are aged 20 hrs at 100°C. Specimens are cut from test plates. Test conditions: 23°C± 2°C and 50% ± 6% rel. humidity.

These are general guidance data. No statement regarding specific properties. All supplies are subject to detailed specifications to be agreed-up in each individual case and containing, among others, the tolerances to be specified therein.

### Delivery form and packing:

Lentil shaped pellets  
PE-Bags, 25 kg net  
Octabins with PE liner bags, 1000 kg net

## General product information

# Elastollan® 695 A U

®= Registered Trademark of BASF Polyurethanes GmbH

### Drying recommendations:

Material must be dried before processing for 2-3 hours at 90-110°C in a dehumidified air dryer. Additives have to be dried with the granules. The water content of the granules should not exceed 0,02%.

### Injection moulding:

When injecting the melt should be bubble and foam free, if not we recommend to adjust the drying temperature accordingly.

**Following temperatures are guide values, showing the tendency of temperature profile. These may vary depending on kind of machine and mould design.**

Feed [°C]	Zone1 [°C]	Zone2 [°C]	Zone3 [°C]	Zone4 [°C]	Nozzle [°C]	Melt-temp [°C]Ca.	Mould-temp[°C] Ca.
40	205 - 215	210 - 220	215 - 225	215 - 225	220 - 230	215 - 225	30 - 50

### General Recommendations:


<b>Circumferential speed</b> (screw speed)		< 0.2 m/s   12 m/min			
<b>Holding pressure</b> (Melt pressure)		400 - 600 Bar			
<b>Injection speed</b>		relatively low			
<b>Retention time of melt</b> (including hot-runner )		< 10 min			
<b>Screw speed</b>	<b>d<sub>screw</sub></b> [mm]	30	45	50	60
	<b>n<sub>max</sub></b> [rpm]	125	80	70	60

To facilitate demoulding, mould surface with a roughness height of approx. 25-35 µm is recommended.

Ejectors should be two or three times larger than for harder thermoplastics.

### Machine Design:

Injection moulding machines with single-flighted, 3-zone screws are suitable for the processing of Elastollan®. Short compression-zone screws are not suitable. The compression ratio should be around 1:2 and should not exceed 1:3. A check ring (shut-off ring) should be incorporated.

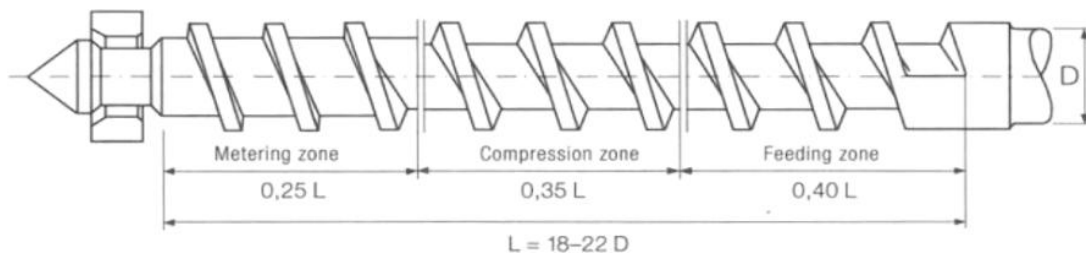

## General product information

# Elastollan® 695 A U

®= Registered Trademark of BASF Polyurethanes GmbH

### Extrusion:

Following temperatures are guide values, showing the tendency of temperature profile. These may vary depending on kind of machine and mould design.

Feed [°C]	Zone1 [°C]	Zone2 [°C]	Zone3 [°C]	Zone4 [°C]	Adaptor [°C]	Head [°C]	Die [°C]
Cooled*	185	195	205	210	210	210	205

\*in case of using a grooved feeding zone


### General Recommendations: circumferential Speed 0.15 m/s max.

Screw speed	d <sub>screw</sub> [mm]	45	60	75	90
	n <sub>max</sub> [min <sup>-1</sup> ]	60	45	35	30

For start-up use screw-speed of about 0,05m/s and starve feeding in order to control screw torque and engine power consumption.

### Machine Design:

Single screw extruder with a compression ratio of 1:2 to 1:3, preferably 1:2,5, are recommended for processing. BASF experience shows that three section screws with L/D ratio of 25 to 30 are most suitable. Three section screw should have continued constant pitch of 1D. The radial clearance between screw and barrel should be 0,1 to 0,2mm. Multizone screws, e.g. barrier screws, have also proven suitable. Short screws with high compression ratio are unsuitable for Elastollan®.

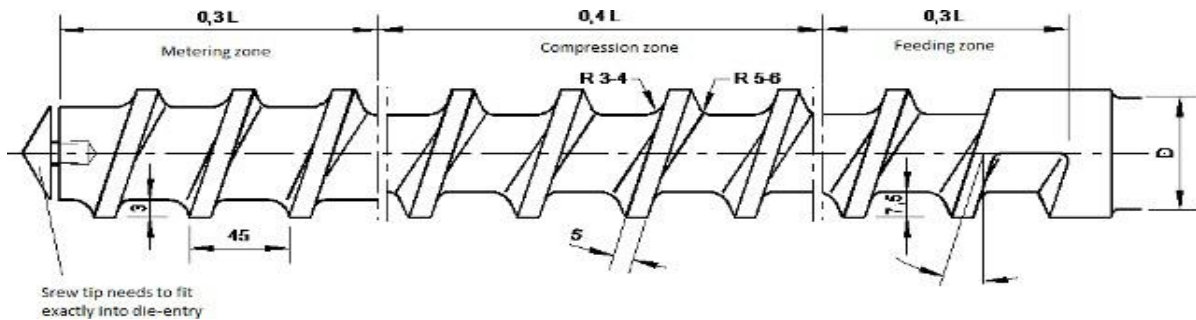

### Processing:

In cool and dry storage and in the original, undamaged and sealed containers, the products are processable for at least 6 months from delivery date. Thereafter, we do not give any warranty or guarantee regarding the processability and/or shelf life of the products. Warranties regarding buyer's rights in case of defects remain unaffected hereby.

### Storage:

Elastollan® is hygroscopic, therefore storage in dry conditions and original container is recommended. Additional information about drying, processing temperatures and post-treatment are given in our product brochure "Thermoplastic Polyurethane Elastomers (TPU) Elastollan®-Processing Recommendations".

### Hazard indication:

No particular hazards known. Please have a look at the Material Safety Data Sheet before handling.

## General product information

# Elastollan<sup>®</sup> 695 A U

®= Registered Trademark of BASF Polyurethanes GmbH

### Waste Disposal:

More detailed information is provided in our country-specific pamphlet and the Material Safety Data Sheet.

### Important Information:

There are national and international laws and regulations to consider if it is intended to produce consumer articles (e.g. articles that necessitate food or skin contact, toys etc.) or medical objects from BASF Polyurethane Specialties (China) Company Ltd products. Where specific regulations do not exist, the current legal requirements of the European Union for consumer articles as well as medical products should be used as reference. Consultation with the BASF Polyurethane Specialties (China) Company Ltd Sales Office and our Ecology and Product Safety Department is strongly recommended.

The data contained in this document as well as advice or other support services are based on our current knowledge and experience. In view of many factors that may affect processing and application of our products, this data does not relieve processors from carrying out their own investigations and tests, particularly with regards to the suitability of the goods supplied for the processes and purposes they intend to use them for; neither does this data imply any guarantee of certain properties, or the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, measured values etc. given herein may change without prior notice and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

### For additional information please contact our Sales Office:

**BASF Polyurethane Specialties (China) Company Ltd.**

No.2333, Gang Cheng Road, Pudong, Shanghai, 200137, P.R. China

Tel.: +86-021-20395517

Fax: +86-021-20395516

Ever-Flaming Advanced  
Material Co., Ltd.  
Baotong Building, Baoan  
District, Shenzhen,  
Guangdong Province,  
China  
Phone: +86 755 29565648  
Fax: +86 755 29565685-806  
[www.coimtpu.com](http://www.coimtpu.com)

九焱新材料(深圳)有限公司

地址: 深圳市宝安区宝民一路宝通大厦

电话: 0755-29565648

传真: 0755-29565685 转 806

网址: [www.coimtpu.com](http://www.coimtpu.com)